

Tobacco Overwrap Range

Description	Film	Yield		Permeability to		Sealing range (°C) 2.0s dwell 0.10MN/m ²	Optical		Shrinkage		Literature Reference
		(m ² /kg)	(g/m ²)	H ₂ O (g/m ² .24hrs) 38°C 90% RH	O ₂ (cc/m ² .24hrs) 23°C 0% RH		Gloss (units) 20°C	Haze (%) 2.5°	MD (%) 60 sec at 120°C	TD (%) 60 sec at 120°C	

Propafilm™ Range of Biaxially Oriented Polypropylene (BOPP) Films

Shrink Tightening High Speed Films

Improved machinability and vending blocking performance	GLT18	61.0	16.4	6.8	1800	110-140	130	1.3	7.0	11.0	B291
	GLT20	54.9	18.2	6.0	1500						
	GLT25	44.0	22.7	4.1	1400						
Superior optical performance	GLS20	54.9	18.2	6.0	1500	115-140	140	1.0	7.0	11.0	B290
	GLS25	44.0	22.7	4.1	1400						
High yield film	XLT16	66.6	15.0	7.6	2200	110-140	135	1.2	7.0	11.0	B299
Printable shrink tightening film	GLP20	54.9	18.2	6.0	1500	110-140	130	1.3	7.0	11.0	B294
	GLP25	44.0	22.7	4.1	1400						
Medium shrink tightening films	SLT20	54.9	18.2	6.5	1700	110-140	130	1.3	7.0	10.0	B296

Standard Films

Improved machinability film	MLT20	54.9	18.2	6.0	1700	110-145	130	1.3	5.0	4.0	B272
Printable, high speed film	MTP20	54.9	18.2	5.8	1600	115-145	140	1.4	5.0	4.0	B271

Clear Collation Films

Transparent acrylic coated films - printable	RC20	54.6	18.3	6.5	950	85-145	*45° 95	1.0-2.0	7.0	NIL	B401
	RC25	43.8	22.8	5.5	850						
	RC30	36.5	27.4	5.0	750						
Shrink tightening acrylic coated - printable	SRC24	45.6	21.9	5.4	750	85-140	*45° 90	2.0	6.0	9.0	B298
Snap wrap Shrink film Non-shrink film	SRCZ	45.6	21.9	5.4	750	85-140	*45° 90	2.0	6.0	9.0	Z01
	01/24	43.8	22.8	5.5	850	85-145	95	1.0-2.0	2.0	NIL	
	RCZ 01/25										
Transparent, uncoated clear collation film	NC23	47.8	20.9	5.3	1650	90-140	125	1.5	4.5	3.5	B288
	NC25	44.0	22.7	5.0	1600	(100-115 Clear Collation)					
Shrink uncoated clear collation film	SNC23	47.8	20.9	5.3	1650	90-140	125	1.5	6.0	9.0	B255
	SNC25	44.0	22.7	5.0	1600	(90-105 Clear Collation)					

Inner Liner Films

Uncoated low heat-seal threshold film - printable	RLC20	54.9	18.2	8.0	2500	90-145	*45° 95	1.5	6.0	2.5	B273
Acrylic coated film - printable	RC20	54.6	18.3	6.5	950	85-145	*45° 95	1.0-2.0	2.0	NIL	B401
	RC25	43.8	22.8	5.5	850						

Tobacco Overwrap Range

GLT18/20/25
GLS20/25
XLT16
GLP20/25
SLT20
MLT20
MTP20


Unit Wrap

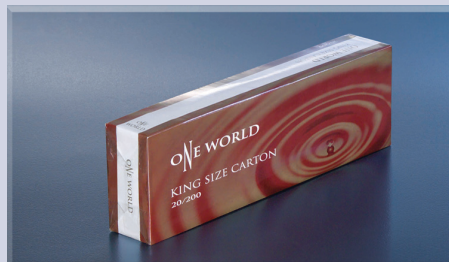
RC20/25/30
SRC24
NC23/25
SNC23/25


Clear collation

SNAP WRAP
SRCZ
RCZ
SNCZ


Easy open

GLT18/20/25
GLS20/25
GLP20/25
SLT20
MLT20
MTP20
RC20/25/30


Carton overwrap

RLC20
RC20/25


Inner liner
Regional Offices:

Europe (UK) Tel +44 (0)16973 42281

Americas (USA) Tel +1 877 822 3456

Asia-Pacific (Aus) Tel +61 3 9303 0600



www.innoviafilms.com
 email: filmsinfo@innoviafilms.com
 ™Trademark of Innovia Films



Disclaimer: Innovia Films or any of its affiliated companies (hereinafter 'Innovia Films') declines any liability with respect to the use made by any third party of the information contained herein. The information contained herein represents Innovia Films' best knowledge thereon without constituting any express or implied guarantee or warranty of any kind (including, but not limited to, the accuracy, the completeness or relevance of the data set out herein). Innovia Films is the sole owner or authorised user of the intellectual property rights relating to the information communicated. The information relating to the use of the products is given for information purposes only. No guarantee or warranty is provided that the product is adapted to the client's specific use. The client should perform their own tests to determine the suitability for a particular purpose. The final choice of use of a product remains the sole responsibility of the client.